155cc LC4V SOHC FI ENGINE

WITH VVA

The liquid cooled single overhead camshaft fuel injected engine churns out a maximum horse power of 13.5kW(18.4PS)/10000r/min and maximum torque of 14.2N• m(1.4kgf • m)/7500r/min.









An A&S (assist and slipper) clutch is adopted to reduce the weight of the clutch pull and provide low-stress shifting during deceleration. The A&S helps to reduce fatigue for the rider. This also prevents excessive engine oraking, thus reducing its effects on chassis behavior. The A&S clutch makes for smooth, enjoyable downshifts.



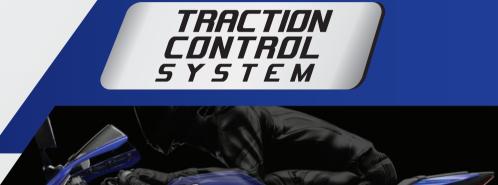

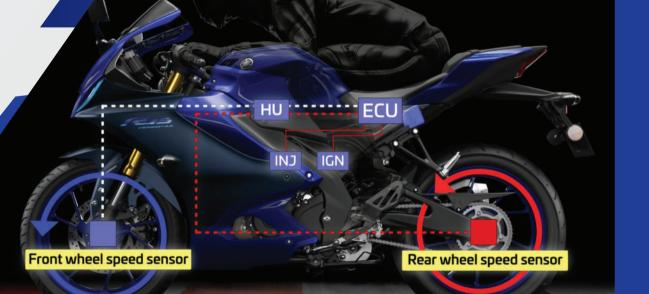

The R15M & R15 V4.0 comes with a Traction Control System. This is a dedicated electronic system that has the remarkable ability of reducing the chances of a wheelspin (slippage due to loss of traction).







ven at Low rpm. There re two intake valve cams: one for low to mid-range rpm and another for high rpm. They switch between each other at the 7,400 rpm mark to ensure good power and torque is present throughout the

entire rev range.



SMS & EMAIL

CALL ALERT_

PHONE BATTERY
LEVEL STATUS

App APP CONNECTIVITY STATUS

Now the R15M has a full colour TFT meter inspired by the R1 . Stay informed of all that happens with the advanced instrument cluster screen.

WITH TRACK MODE & STREET MODE

The two riding modes (Track Mode & Street Mode) display important information on the instrument cluster screen.





Stay connected even on the move. Y-Connect is Yamaha's latest innovation that lets you link your smartphone directly to your Yamaha motorcycle.

STREET MODE

Coolant Temperature

Average Speed

Battery Power

Latest Lap Time

TRACTION CONTROL SYSTEM INDICATOR

QUICK SHIFTER INDICATOR*





FUNCTIONAL











Super Wide 140 mm Radial Rear Tyre



Side Stand With Engine Cut-Off Switch





Top Cap Engraved With R15M Logo



R15M

DESIGN FEATURES



Aluminium Swingarm



Grey Color Muffler Guard

COLOR VARIANTS

Authorised Dealer

SPECIFICATIONS

Liquid cooled, 4-stroke, SOHC, 4-valve

Engine



58.0 x 58.7 mm 13.5kW(18.4PS)/10000r/min Wet, multiple-disc

Electric starter Starting system type Constant mesh, 6-speed

Dimensions

| уре | Deltabox | Ove |
|---------------------------|--|------|
| ıspension system | Telescopic Upside Down Fork (USD Fork) | Ove |
| spension system | Linked-Type Monocross Suspension | Ove |
| rpe (front) | Disc brake (282 mm) | Sea |
| rpe (rear) | Disc brake (220 mm) | Wh |
| e (front) | 100/80-17M/C 52P - Tubeless | Min |
| e (rear) | 140/70R17M/C 66H - Radial Tubeless | Ker |
| be diameter of front fork | 37.0 mm | (wit |
| | Dual channal | Fue |

Chassis

Fuel meter

815 mm 1325 mm

Other Information

| | 12 V, 4 Ah | Clock |
|-------------|-----------------------------|----------------------------------|
| | Bi-functional LED (Class D) | |
| | LED | Riding Modes |
| | LED | Dual horn |
| | Digital | Y-Connect (Smartphone |
| Digital | Digital | Bluetooth Connectivity) |
| | Digital | Side stand engine cut-off switch |
| | Equipped | Traction control system |
| | Equipped | Quick shifter |
| | | (up-shift) |
| cator | Equipped | |
| n indicator | Equipped | Color TFT Meter |
| licator | Equipped | |

artphone connectivity ack Mode / Street Mode *Available as an accessory for Dark Knight & Metallic Red

Yamaha Motor India Sales Pvt. Ltd., AKDR Tower-5th Floor, Door No. 3/381, Rajiv Gandhi Salai (OMR) Mettukuppam, Chennai - 600097. Phone: 044-3814 7000. Toll Free No.: 1800 420 1600 Email: info@yamaha-motor-india.com www.yamaha-motor-india.com





PERFECTION







