

Premium+

HOMOGENEOUS VINYL FLOORING



Jeoflor



34-43

UV

100% recyclable



0950 Cotton



0951 Breeze



0952 Mole



0953 Chocolate



0954 Musk



0955 Grey Stone



0956 Pebble



0957 Cloud





34-43

UV

100% recyclable


Premium+



0958 Stone



0959 Sunshine

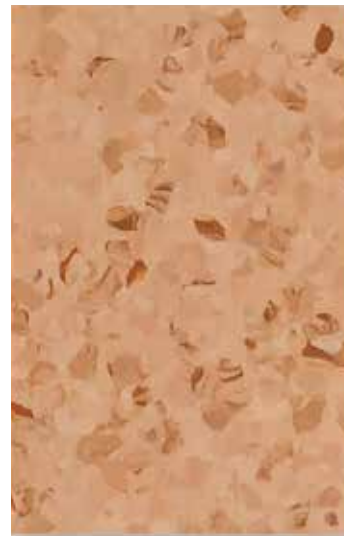

0960 Twilight



0961 Sunset




0962 Light Ocre



0963 Mustard



0964 Rosa

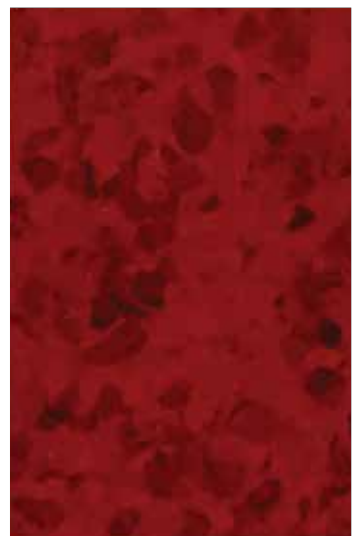

0965 Tomatoe





34-43


UV

100% recyclable

Premium+




0966 Sapphire

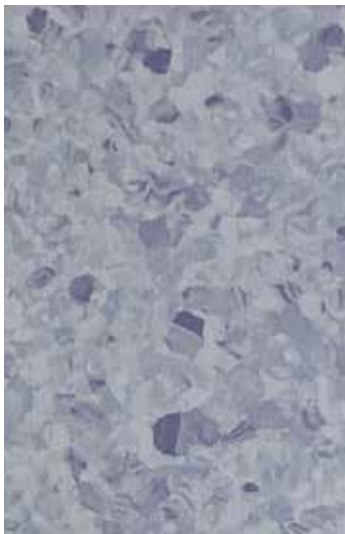

0967 Mix Blue



0968 Green Apple

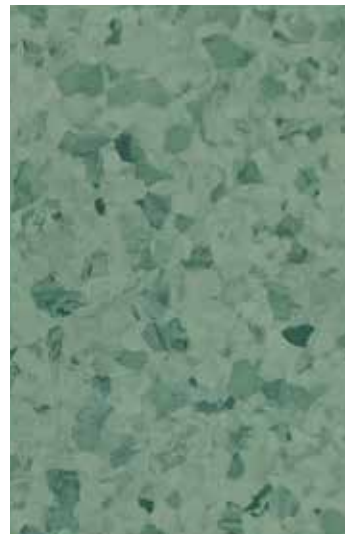


0969 Lagoon




0970 Emerald Green



0971 Cumin

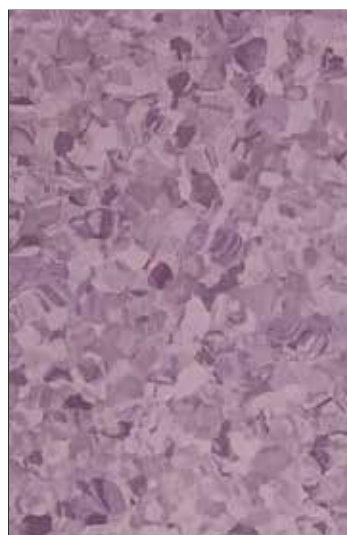

0972 Lavender

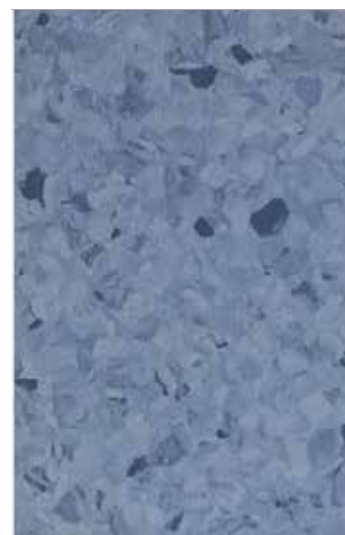

0973 Blue Crop



0974 Sand





LCA

- Manufactured in an ISO 14001 and ISO 50001 certified site
- Product specific EPD (Environmental Products Declaration) available
- Eco-designed according to a product specific Life Cycle Analysis
- Contribution to many Green Building Schemes (LEED, HQE, BREEAM)
- Patented surface treatment PUR+ protected to reduce drastically the use of chemical products and water and ensure the lowest environmental impact



INDOOR AIR QUALITY

- TVOC emissions 100 times better than norm requirements (TVOC < 10 µg/m³ after 28 days)
- Comply with AgBB protocol
- No formaldehyde emission
- Floorscore certified
- M1 certified



WELLNESS

Health

- Antibacterial activity (Inhibits growth > 99%)

Comfort

- Walking comfort < 75 dB



COMPOSITION

100% REACH compliant

- FREE of formaldehyde
- FREE of heavy metals
- FREE of Solvent






RECYCLABILITY

- 100% recyclable product



RECYCLED CONTENT

- 100% REACH compliant recycled content

DESCRIPTION			
Total Thickness	EN ISO 24346	2.0mm	
Length / Width	EN ISO 24341	2m x 20m	
Weight	EN ISO 23997	2.0mm: 2800g/m ²	
CLASSIFICATION			
Fire rating	GB8624-2012	Class	Bfl-s1
Toxic testing	GB18586-2001	-	Good
Electrical resistance	EN1081	Ω	>10 ⁹ -10 ¹⁰
Slip resistance	EN13893	-	≥ 0.3
Slip resistance wet	DIN51130	Class	R9
PERFORMANCES			
Dimensional stability	BS EN ISO 23999	%	≤ 0.4
Thermal conductivity	EN12667	W/(m.k)	0.03
Castor wheel test	EN425	-	Suitable
Wear resistance	EN660.2	mm ³	≤ 2.0
Abrasion Group	EN649	group	T
Type binder content	ISO 10581	type	I
Residual group	EN ISO 24343.1	mm	0.03
Colour fastness	EN ISO 105-B02	mm	6
Chemical product resistance	EN ISO 26987	degree	Good
Antibacterial property	EN ISO 846-C	-	No bacterial growth
Flexibility	EN 435	-	Excellent
Hygiene treatment	MRSA	-	Very good
Impact sound reduction	EN ISO 10140/1 EN ISO 717/2	-	Approx.+4DB
Surface treatment	-	UV Protected	PUR+ Iodine stain free
CE MARKING			
	EN 14041		 DS  Bfl-s1 

The implementation of an effective cleaning regime is the most important defence against infections.



Be connected!



#Jeoflor



Jeoflor

Our related products!



Floor
Self Leveling



Wall Coverings
& Protections




Skirting &
Profiles



Handrails

Jeoflor

Alptahls GmbH, Bürgergasse 4, 8330 Feldbach, Austria. 

Tel. +43 (0)3152 370 49

info@jeoflor.com www.jeoflor.com

Toll Free : 18002028498