

**TATA MOTORS
GENSETS**

Rishabh
POWER WITH CARE

#HindustanKaGlobalGenset



CPCB IV+

Range



+91 9810145225



marketing@rishabhengineering.com



www.tatamotorsgensets.com
www.rishabhgenerators.com

SALIENT FEATURES

- **Built for High Temperature:** All The Silent Generators of Rishabh Are Designed to withstand the ambient temperature of 45 degree Celsius, though the radiators used are able to withstand ambient temperature of 50 degree Celsius.
- **Sturdy:** TATA Engines are most sturdy as they are originally designed for Commercial vehicle application & can go upto 5000 RPM.
- **Lowest Fuel Consumption :** Rishabh Generators powered by TATA engines have the lowest fuel consumption as more available power of the engine allows optimal fuel flow & there by the generator runs smoothly & efficiently.
- **Widest Service Network:** In India We at Rishabh | TATA Give you the most widespread Service network, with over 1800 Service dealers across India, we have the most extensive service network.
- **Highest block loading capacity (70% - 90%)** across range which is best in Industry.
- **Annual maintenance contract** through our responsive-service network. Extended warranty Option available.

WORLD CLASS GENSETS

MADE IN INDIA FOR THE WORLD

Our world class Gensets come with:

India's World's India's World's India's India's World's World's World's World Class World Class		Diesel Engine	TATA
		AC Generator	STAMFORD/MECCALTE
		Steel for Acoustics	TATA STEEL
		Genset Controllers	DEEP SEA
		Foam for Acoustics	Sheela
		Lead Acid Battery	EXIDE BATTERIES
		A.V.M Pads	POLYBOND
		Switchgear	Schneider Electric
		Paint	AKZO Nobel
		World Class Self Starter & Dynamo	Lucas TVS
World Class Radiator	TATA TOYO		



EVERY COMPONENT MATTERS

We at Rishabh | TATA have used the Best Components of The Industry to give you a World Class Product.

Below You May Find A Sneak Peek on Some of The Major Components.

ACOUSTIC ENCLOSURE


Our Silent Gensets use India's No 1 Steel in our gensets by **TATA STEEL**

- Aesthetically designed, weather and sound resistant enclosure.
- Designed for Ease of Access and Serviceability.
- Acoustic Enclosures come with UV resistant powder coating which can withstand extreme weather conditions.
- Smallest Footprint giving an edge to optimize your valuable space.
- Ease of handling with appropriately located Center/ Single lifting arrangement & Forklift Slots for easy shifting.
- Inbuilt Silencer up-to 75kVA, above 75kVA Silencer Comes with Bird Protection.
- Practically located fuel filling point.
- Rishabh Silent Gensets Come with India's No.1 Sheela Foam (makers of Sleepwell Mattress).
- Certified for stringent and latest MoEF / CPCB IV+ norms of less than 75 dB at 1 meter.
- Super Silent models for special applications which have 68-70 db sound level at 1 meter in open field conditions.
- The Foam used in enclosure is fire retardant.

GENSET CONTROLLER / SWITCHGEAR EQUIPMENT

Our Generators come with World class controllers from Deep sea

- Fault recognition by name unlike other controllers which display fault code.
- Microprocessor based.
- Brilliant & bigger best in class LCD screen.
- Lowest battery consumption in ideal condition.
- Manual Breaker operation with tactile buttons on front panel.
- This controller comes with IP 65 protection against water seepage.
- World class Dgset monitoring & protection features.
- Available with Automatic & Manual Functions on demand.
- Rishabh Generators come with World No. 1 Switch gear from Schneider / L&T

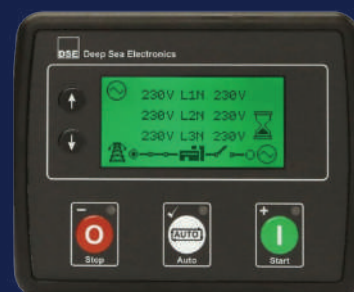

Disclaimer: All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them.

TECHNICAL SPECIFICATION

DG SET	DG Set Model	RT+20	RT+25	RT+30	RT+35	RT+40	RT+45	RT+50	RT+62.5	RT+75	RT+82	RT+100	RT+125	RT+140	RT+160*		
		Rating (kVA)	20	25	30	35	40	45	50	62.5	75	82.5	100	125	140	160	
	Rating (kW)	16	20	24	28	32	36	40	50	60	66	80	100	112	128		
ACOUSTIC ENCLOSURE	Starting System	12V DC															
	Battery (Ah)	90										100					
	Canopy Size : LxBxH (mm)	2400 X 1100 X 1550					2600 X 1100 X 1600				2800 X 1100 X 1760			3300 X 1250 X 1950			
	Fuel Tank Capacity (Ltrs)	100					160					240					
	Weight (Kg)	950	950	1050	1150	1200	1250	1375	1475	1860	1860	2205	2205	2275	2345		
	Thickness of Foam In doors	40								50			75				
	Density of Foam for Sound Insulation	32								38			50				
	Steel Thikness in Acoustic	TATA Steel Base 3 mm Rest of Canopy 1.6 mm															
ENGINE	Engine Model Family	497SP				497SPTC89				497TC57		697TC60		697TC60			
	Engine Make	TATA															
	Engine Power (Bhp)	43	43	43	74	74	74	74	74	102	102	158	158	158	158		
	Rated Speed (RPM)	1500															
	No. of Cylinders	4										6					
	Bore (mm)	97	97	97	97	97	97	97	97	97	97	97	97	97	97	97	
	Stroke (mm)	100	100	100	100	100	100	100	100	100	128	128	128	128	128	128	
	Total Displacement (CC)	2960								3800			5700				
	Lube oil Sump Capacity (Ltrs)	7								10			15				
	Total Coolant Capacity (Ltrs)	13								16			25				
	Oil Change Period	500 Hrs Or 6 Months Which Ever Is Earlier															
	Compression Ratio	17.5 : 01															
	Aspiration	TCIC & CRDI															
	Cooling System	Water/Coolant															
	FIP	MICO Bosch - CRDI															
	Governing Type	Electronic-G3															
DEF Tank Capacity (Ltr)	N/A								TATA Motors Premix as per ISO 22241 (25Ltr.)								
Emission Norms	CPCB-IV+ Compliant																
ALTERNATOR	Alternator Make	Meccalte Stamford															
	Type (PF)	Brushless, H Class Insulation (0.8)															
	Frequency (Hz)	50															
	Voltage (V)	230/415															
	Amperes (A) @ 415 V	27	34	41	48	55	62	69	86	104	114	139	173	195	223		
CONTROLLER	Controller Make	Deepsea															
	Type	Microprocessor Based, LCD fault display screen, Auto start / Stop Features															
	Remote Monitoring System	Optional							Available								
	Display Parameters	Run Time Hours, Current, Voltage, Engine RPM, Frequency, Engine Temperature & Oil Pressure, Battery V, Service Due Hours, kVA, PF, KW, KWH, Fuel and DEF level Visual															
	Modes Available	Automatic/ Manual															
	DG Protections	Under/Over Frequency ,Current Unbalance, Over Speed, Overload, RWL, LLOP, HWT, LFL, Charging Alternator/V-belt, Emergency-Off, Service Due Fail To Start Fail To Stop															
MCCB/MCCB	SCHNEIDER / L&T																

* Stand By Rating ^ Coming Soon, Note: In View of continuous product upgradation & design changes, above specifications & dimensions are subject to change without prior notice

India's No. 1 TATA Engine

What makes **TATA** diesel engine India's no.1 selling diesel engine ?

- **Maximum Power** : The engines have the highest Break Horse Power (BHP) & Highest Cubic Capacity (CC) in its class.
- **Environment Friendly** : The engines confirm to CPCB IV+ India norms having lowest emissions.
- **Global Engines of India** : **TATA** engines are truly world class & are used by DGSET Manufacturers Globally.



AC Generator | Alternator

Salient Features of Alternators

- Best in Class Efficiency.
- 2/3 pitch winding alternator for better handling of harmonic and un-balanced load.
- Brushless Type and insulation.
- Self-excited, self-regulated Single Bearing, Brushless & Continuous Duty.
- Protection Degree IP21/IP23.
- Inbuilt DVR in most alternators




Disclaimer: All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them.

TATA MOTORS GENSETS

Rishabh

POWER WITH CARE



#HindustanKaGlobalGenset



09001
Rishabh
SILENT GENSETS

Authorized Dealer Stamp



Manufactured By :
Authorized Goem | **TATA MOTORS**
Rishabh Engineering Co. 217 Richpalpuri Opp. Hapur Morh,
G. T. Road Ghaziabad, Delhi NCR-201001 India

Printed In India
PG/RT/050/S20-160/REC/MARCH/2024/2000

Use of the material for reproduction on the internet and world web is strictly prohibited without written permission from Rishabh Engineering Co.